
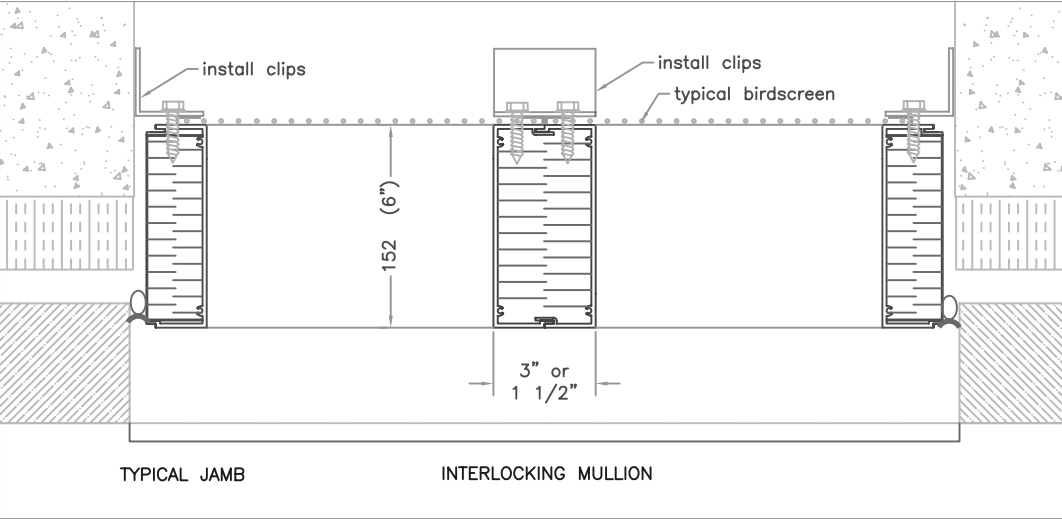
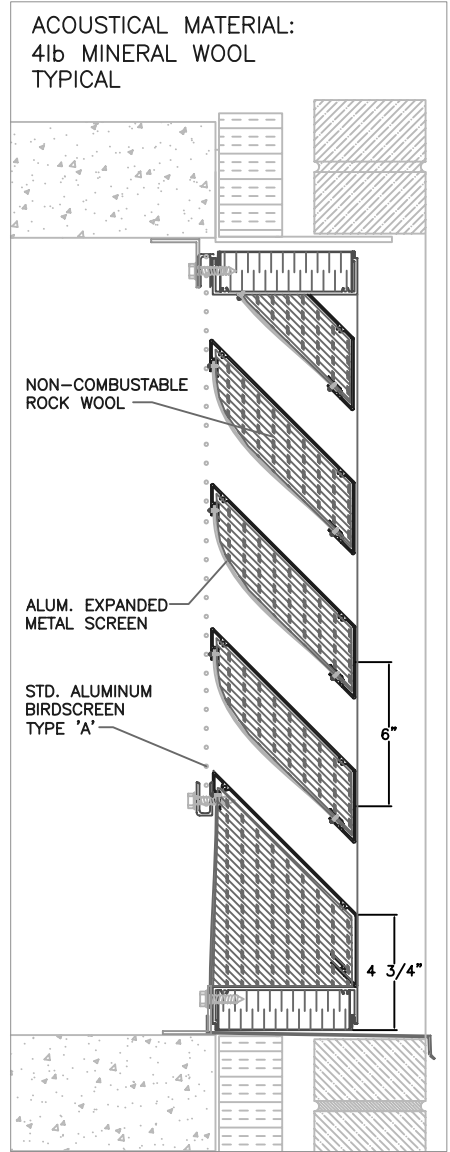


MODEL AC-645

TRANSMISSION LOSS FREE FIELD NOISE ASTM E-90	
FREQUENCY HZ.	-DB
125	-8
250	-8
500	-9
1000	-16
2000	-19
4000	-21

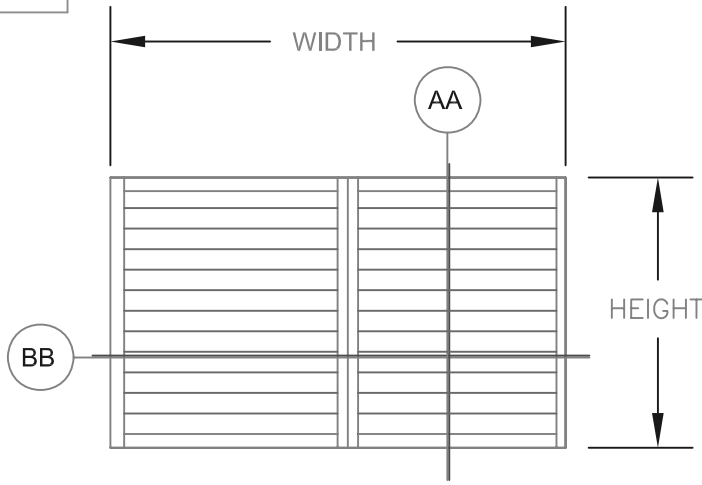

BB - TYPICAL HORIZONTAL SECTION

AA - TYPICAL LOUVER SECTION

AC-645 SPECIFICATIONS

BLADES ACOUSTIC 4lb MINERAL WOOL ASSEMBLY - S/S MECHANICAL STANDARD WELDED OPTION

CHANNEL FRAME - TYPE 'U' EXTRUDED ALUMINUM 6063-T52 FRAME .081(2mm) .125(3mm)

INTERLOCKING - VISIBLE MULLIONS BLADES .100(2.5mm)

OPTIONS 3" - 1 1/2" -

ACOUSTICAL MATERIAL 4 lbs - MINERAL WOOL SCREENS TYPE A - ALUM. TYPE G - GALVANIZED TYPE I - INSECT

C/W EXPANDED ALUM. SCREEN 1/2" X 1/2" .063 WIRE 1/2" X 1/2" 19 GAUGE 18X14 ALUMINUM MESH

TAG	QTY.	OPENING SIZE		ACTUAL SIZE		FRAME	MULL.	SECTIONS WIDE	SCREEN TYPE	LOCATION / NOTE
		WIDTH	HEIGHT	WIDTH	HEIGHT					
T-1										
T-2										
T-3										
T-4										
T-5										
T-6										
T-7										

1734 Orangebrook Crt.
Pickering, Ontario
CANADA L1W 3G8
(905) 420-0485 TEL.
(905) 420-4564 FAX
(888)-624-4557 TEL.
(888)-624-4558 FAX

McGill Louvers

INFORMATION SHEET

EMAIL engineering@mcgillarchitectural.com

FINISHES COLOUR # _____

MILL FINISH

5000 SERIES AAMA -603 BAKED ENAMEL

10000 SERIES AAMA -605.2 KYNAR 2 COAT

15000 SERIES AAMA -605.2 KYNAR 3 COAT

CLEAR ANODIZING .0004 .0007

COLOUR ANODIZING _____

PROJECT: _____

ARCH/ENG: _____

CONTRACTOR: _____

REPRESENTATIVE: _____

SCALE _____ DATE _____ SHEET _____

NTS - OF