
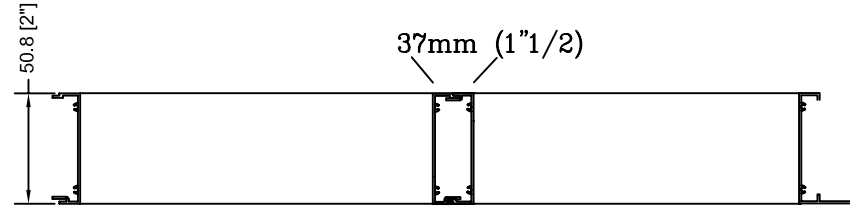
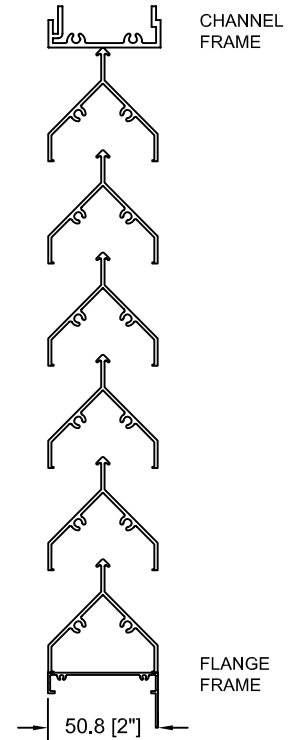


MODEL V-245

SECTION A

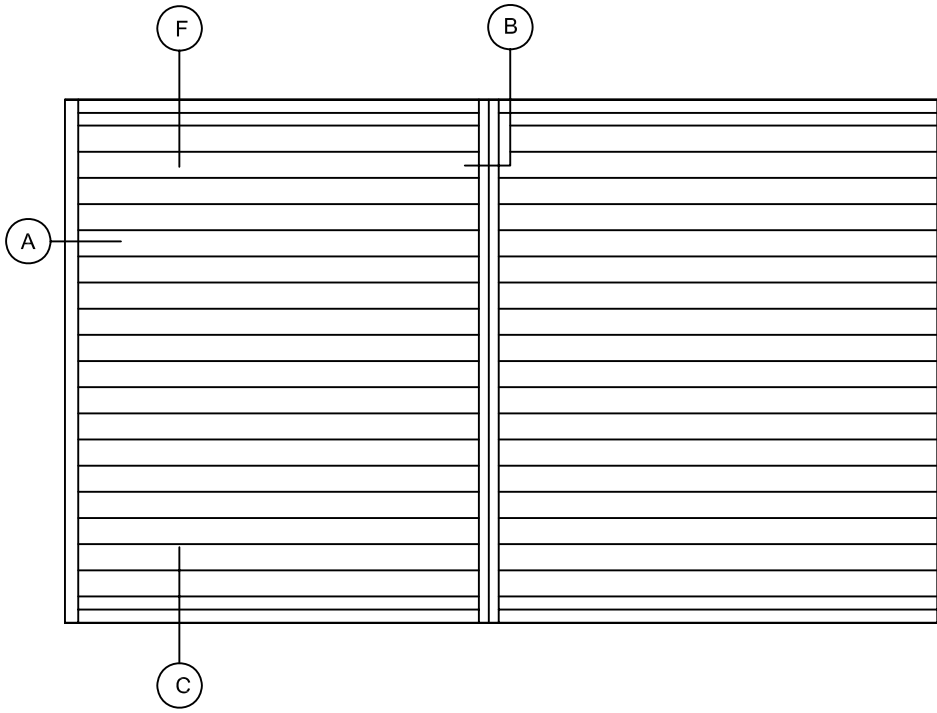

SECTION C
JAMB MULLION
TYPE C FRAME

SECTION B
INTERLOCKED
MULLION

SECTION F
JAMB MULLION
TYPE F FRAME

V-245 SPECIFICATIONS

BLADES HIGH PERFORMANCE DRAINABLE ASSEMBLY - S/S MECHANICAL STANDARD
WELDED OPTIONAL

FRAME CHANNEL TYPE C EXTRUDED ALUMINUM 6063-T52 FRAME .081(2mm) .125(3mm)
FLANGE TYPE F
MULLIONS - VISIBLE MULLION TYPE VM SCREENS - ALUM. TYPE A 1/2" X 1/2" .063 WIRE - GALVANIZED TYPE G - INSECT TYPE I
INTERMEDIATE SUPPORT TYPE IS C/W FRAME 1/2" X 1/2" 19 GAUGE 18X14 ALUMINUM MESH
BLADE .081(2mm)

L#	QUANT.	OPENING SIZE		FRAME	MULL.	SECTIONS WIDE	SCREENS	LOCATION
		WIDTH	HEIGHT					
L-1								
L-2								
L-3								
L-4								
L-5								
L-6								
L-7								

McGILL LOUVERS
1734 Orangebrook Crt. (905) 420-0485 TEL.
Pickering Ontario (905) 420-4564 FAX
CANADA (888)-624-4557 TEL.
L1W 3G8 (888)-624-4558 FAX
EMAIL : engineering@the-mcgill-group.com

FINISHES COLOUR # _____
 MILL FINISH
 5000 SERIES AAMA -603 BAKED ENAMEL
 10000 SERIES AAMA -605.2 KYNAR 2 COAT
 15000 SERIES AAMA -605.2 KYNAR 3 COAT
 CLEAR ANODIZING .0004 .0007
 COLOUR ANODIZING _____

PROJECT
ARCH/ENG.
CONTRACTOR
REPRESENTATIVE
SCALE DATE SHEET
OF