

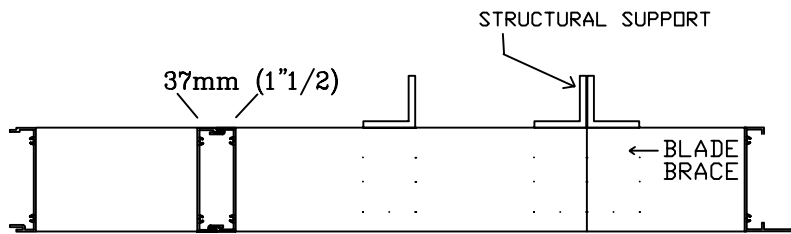
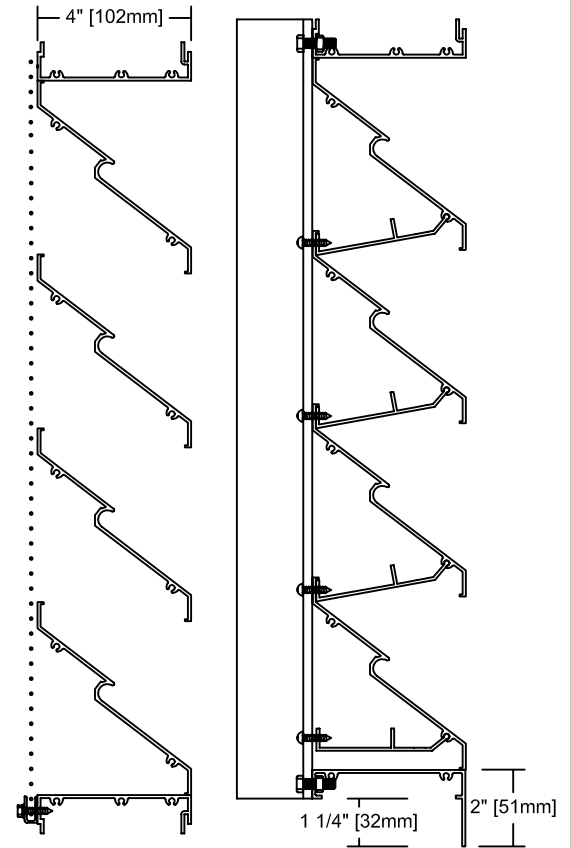


MODEL SP445

SECTION A SECTION B

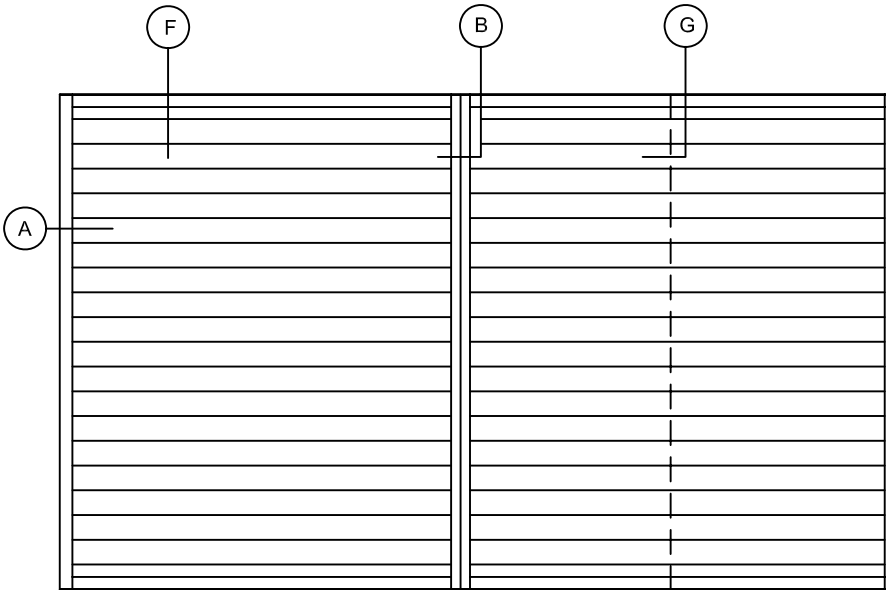

SECTION C JAMB MULLION TYPE U FRAME
 SECTION D INTERLOCKED MULLION
 SECTION G INTERMEDIATE SUPPORT
 SECTION E CONCEALED MULLION
 SECTION F JAMB MULLION TYPE F FRAME

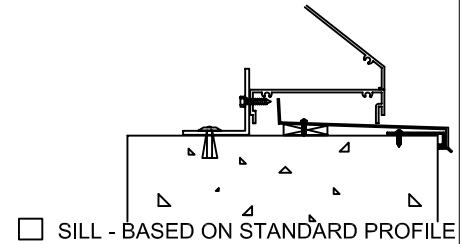

SP445 SPECIFICATIONS

BLADES WEATHER RESISTANT

ASSEMBLY - S/S MECHANICAL STANDARD
 WELDED OPTIONAL

FRAME DRAIN FLANGE TYPE F
 DRAIN CHANNEL TYPE U

EXTRUDED ALUMINUM 6063-T52

FRAME .081(2mm) 0.125 (3mm)

BLADE .081(2mm) 0.125 (3mm)

MULLIONS - VISIBLE MULLION TYPE VM
 CONCEALED MULLION TYPE CM
 INTERMEDIATE SUPPORT TYPE IS

SCREENS - ALUM. TYPE A
 1/2" X 1/2" .063 WIRE
 C/W FRAME

- GALVANIZED TYPE G - INSECT TYPE I
 1/2" X 1/2" 19 GAUGE 18X14 ALUMINUM MESH

L#	QUANT.	OPENING SIZE		FRAME	MULL.	SECTIONS WIDE	SCREENS	LOCATION
		WIDTH	HEIGHT					
L-1								
L-2								
L-3								
L-4								
L-5								
L-6								
L-7								

McGILL LOUVERS

1734 Orangebrook Crt. (905) 420-0485 TEL.
 Pickering Ontario (905) 420-4564 FAX
 CANADA (888)-624-4557 TEL.
 L1W 3G8 (888)-624-4558 FAX
 EMAIL : engineering@the-mcgill-group.com

FINISHES

COLOUR # _____

- MILL FINISH
- 5000 SERIES AAMA -603 BAKED ENAMEL
- 10000 SERIES AAMA -605.2 KYNAR 2 COAT
- FLUOROPON CLASSIC 2
- CLEAR ANODIZING .0004 .0007
- COLOUR ANODIZING _____

PROJECT _____

ARCH/ENG. _____

CONTRACTOR _____

REPRESENTATIVE _____

SCALE _____ DATE _____

SHEET _____

OF _____