
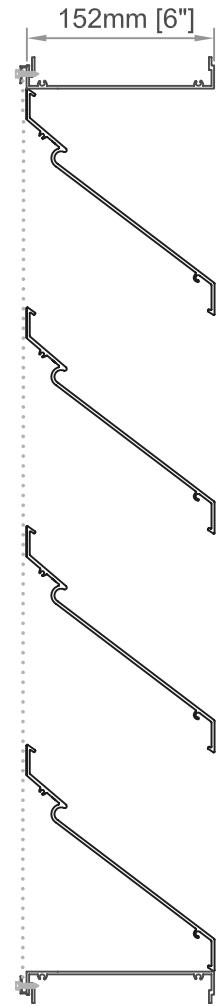



MODEL SP-650

- WEATHER RESISTANT BLADES

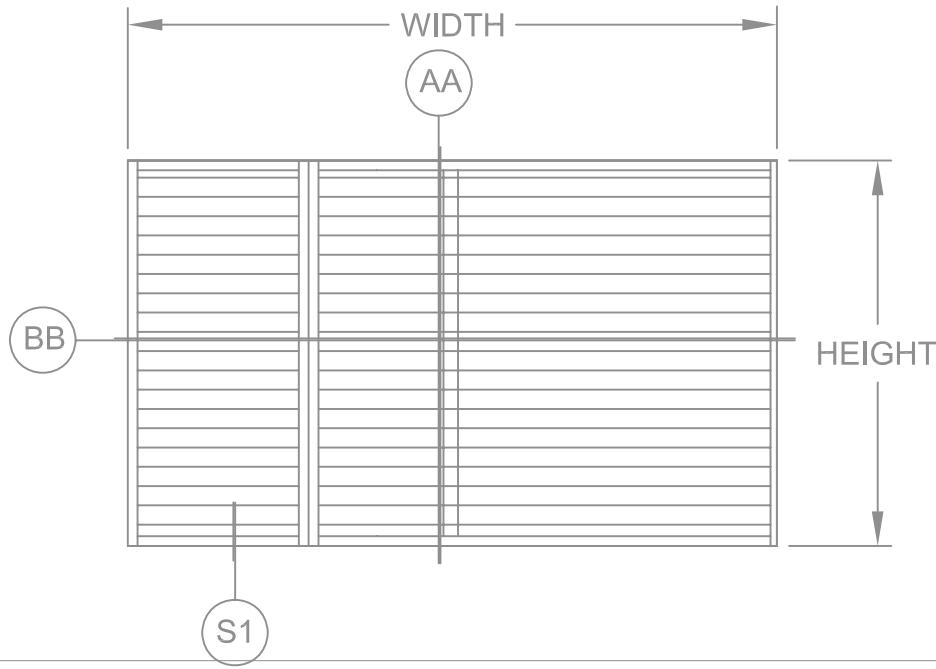

CHANNEL FRAME - TYPE U

AA - TYPICAL ACTIVE SECTION

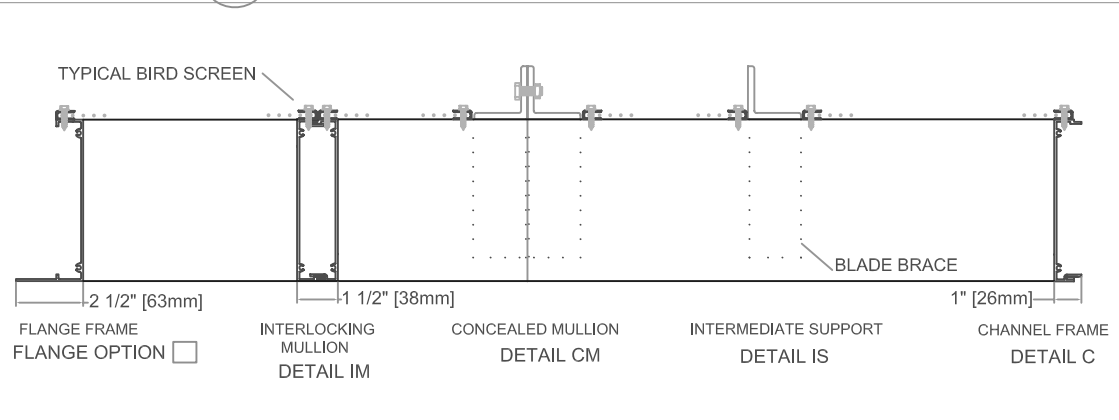

SP-650 SPECIFICATIONS

BLADES - WEATHER RESISTANT

ASSEMBLY - S/S MECHANICAL STANDARD

FRAME CHANNEL FRAME TYPE U
FLANGE OPTION

EXTRUDED ALUMINUM 6063-T52 FRAME .081(2mm)
BLADE .100(2.5mm)

MULLIONS- VISIBLE MULLION
CONCEALED MULLION
INTERMEDIATE SUPPORT

TYPE VM
TYPE CM
TYPE IS

SCREENS
C/W FRAME

TYPE A - ALUM. 1/2 X 1/2" .063 WIRE

TYPE G - GALVANIZED 1/2" X 1/2" 19 GAUGE

TYPE I - INSECT 18X14 ALUMINUM MESH

TAG	QTY.	OPENING SIZE		ACTUAL SIZE		FRAME	MULL.	SECTIONS WIDE	SCREEN TYPE	LOCATION / NOTE
		WIDTH	HEIGHT	WIDTH	HEIGHT					
LV1										
LV2										
LV3										
LV4										
LV5										
LV6										
LV7										



1734 Orangebrook Crt.
Pickering, Ontario
CANADA L1W 3G8
(905) 420-0485 TEL.
(905) 420-4564 FAX
(888)-624-4557 TEL.
(888)-624-4558 FAX

FINISHES

COLOUR # _____

- MILL FINISH
- 5000 SERIES AAMA -603 BAKED ENAMEL
- 10000 SERIES AAMA -605.2 KYNAR 2 COAT
- 15000 SERIES AAMA -605.2 KYNAR 3 COAT
- CLEAR ANODIZING .0004 .0007
- COLOUR ANODIZING _____

PROJECT: _____

ARCH/ENG: _____

CONTRACTOR: _____

REPRESENTATIVE: MCGILL ARCHITECTURAL PRODUCTS

SCALE _____ DATE _____ SHEET _____

NTS - _____ OF _____

EMAIL engineering@mcgillarchitectural.com