

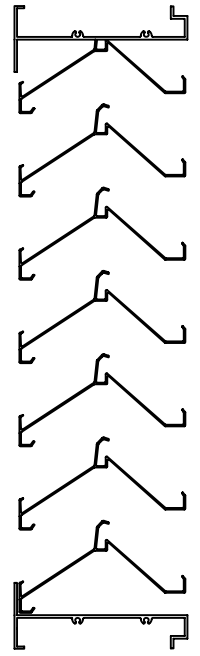


# MODEL RSR-5H

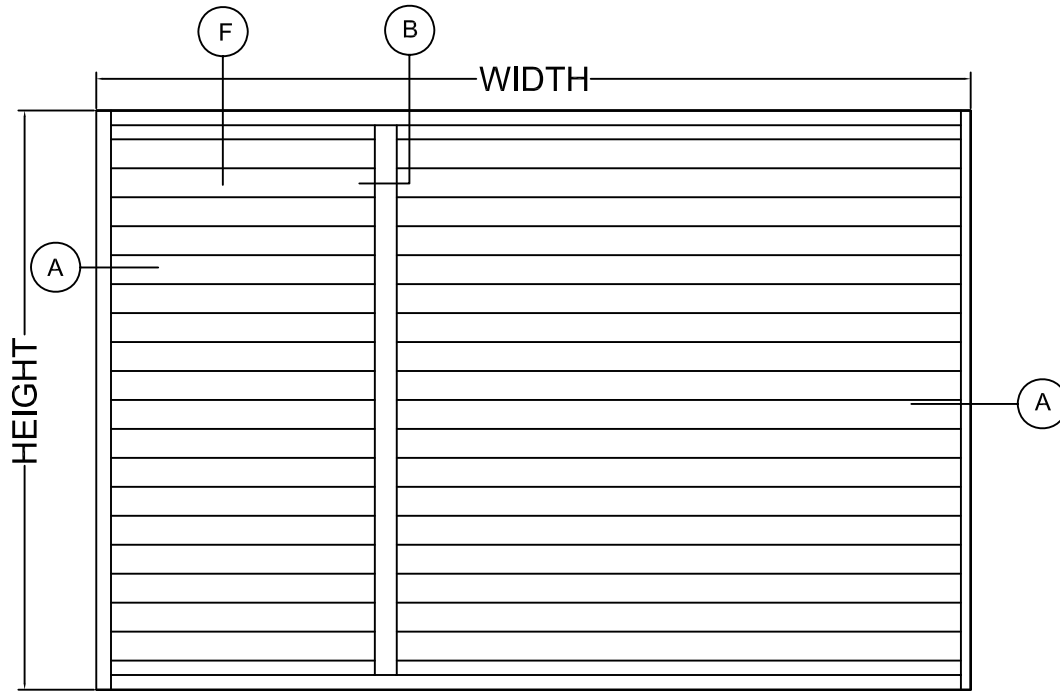

DETAIL F

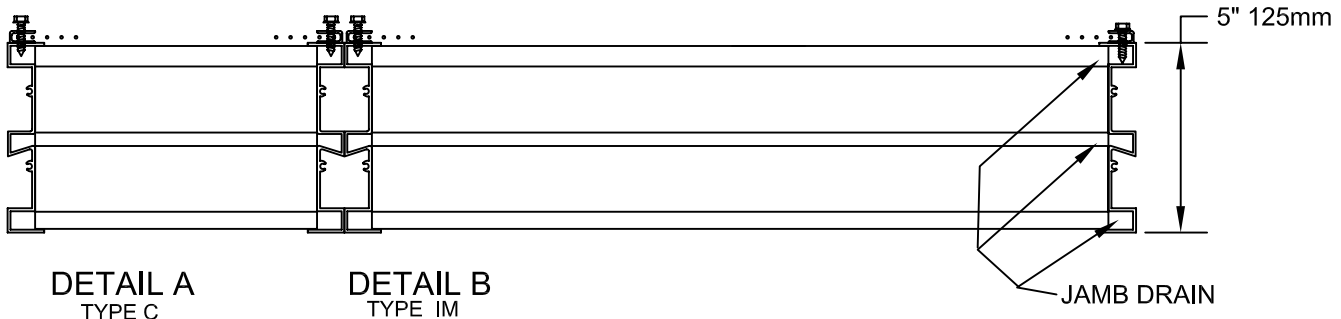

## RSR-5H SPECIFICATIONS

BLADES	HIGH PERFORMANCE DRAINABLE RAIN STORM RESISTANT	ASSEMBLY - S/S MECHANICAL STANDARD WELDED OPTIONAL
FRAME	CHANNEL TYPE C DRAINABLE JAMB	EXTRUDED ALUMINUM 6063-T52
MULLIONS	- INTERLOCK MULLION TYPE VM	FRAME 0.081" <input type="checkbox"/>
SCREENS	- ALUMINUM TYPE A 1/2" X 1/2" .063 WIRE C/W FRAME	BLADE 0.070" <input type="checkbox"/>
		- GALVANIZED TYPE G 1/2" X 1/2" 19 GAUGE
		- INSECT TYPE I 18X14 ALUMINUM MESH

L#	QUANT.	OPENING SIZE		FRAME	MULL.	SECTIONS WIDE	SCREENS	LOCATION
		WIDTH	HEIGHT					
L-1								
L-2								
L-3								
L-4								
L-5								
L-6								
L-7								

## McGILL LOUVERS

1734 Orangebrook Crt. (905) 420-0485 TEL.  
 Pickering Ontario (905) 420-4564 FAX  
 CANADA (888)-624-4557 TEL.  
 L1W 3G8 (888)-624-4558 FAX  
 EMAIL : engineering@the-mcgill-group.com

## FINISHES

COLOUR # \_\_\_\_\_

- MILL FINISH
- 5000 SERIES AAMA -603 BAKED ENAMEL
- 10000 SERIES AAMA -605.2 KYNAR 2 COAT
- 15000 SERIES AAMA -605.2 KYNAR 3 COAT
- CLEAR ANODIZING  .0004  .0007
- COLOUR ANODIZING \_\_\_\_\_

## PROJECT

ARCH/ENG.

CONTRACTOR

REPRESENTATIVE

SCALE DATE

SHEET

OF