
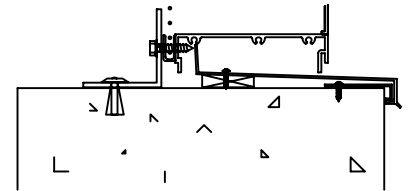
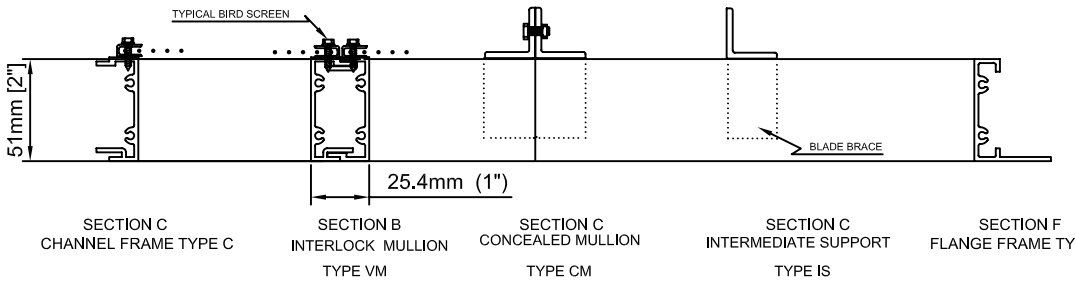
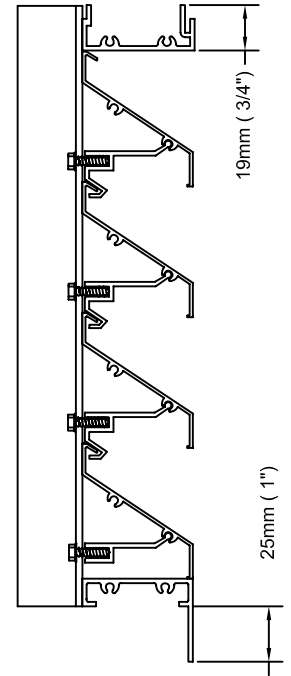
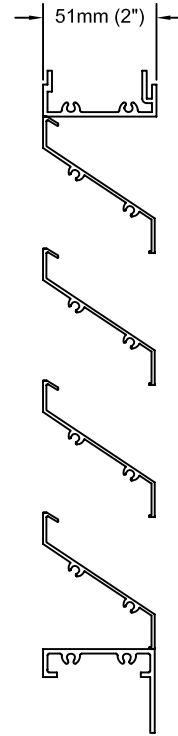


# MODEL HP-245

SECTION F

SECTION G

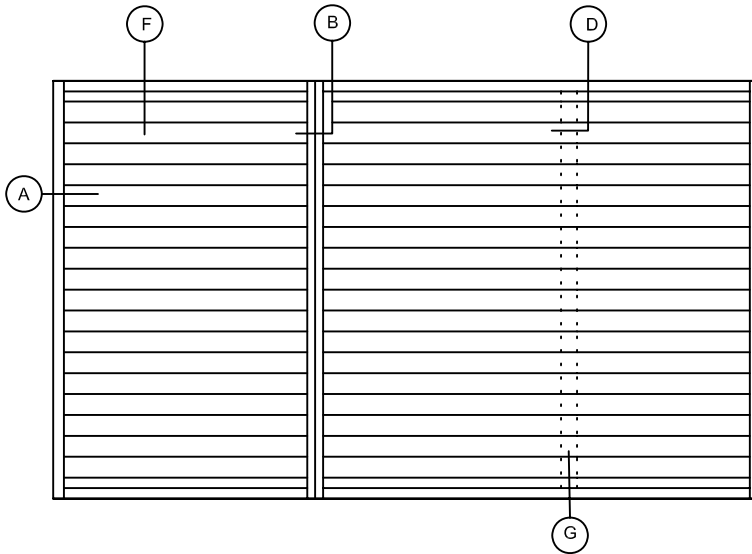

SILL OPTION

## HP-245 SPECIFICATIONS

BLADES HIGH PERFORMANCE

ASSEMBLY - S/S MECHANICAL STANDARD  
WELDED OPTIONAL

FRAME CHANNEL TYPE C  
FLANGE TYPE F

EXTRUDED ALUMINUM 6063-T52 FRAME .060(1.5mm)

BLADE .060(1.5mm)

MULLIONS CONCEALED MULLION TYPE CM  
INTERMEDIATE SUPPORT TYPE IS  
VISIBLE MULLION TYPE VM

SCREENS - ALUM. TYPE A  
1/2" X 1/2" .063 WIRE  
C/W FRAME

- GALVANIZED TYPE G 1/2" X 1/2" 19 GAUGE  
- INSECT TYPE I 18X14 ALUMINUM MESH

L#	QUANT.	OPENING SIZE		FRAME	MULL.	SECTIONS WIDE	SCREENS	LOCATION
		WIDTH	HEIGHT					
L-1								
L-2								
L-3								
L-4								
L-5								
L-6								
L-7								

## McGILL LOUVERS

1734 Orangebrook Crt. (905) 420-0485 TEL.  
Pickering Ontario (905) 420-4564 FAX  
CANADA (888)-624-4557 TEL.  
L1W 3G8 (888)-624-4558 FAX  
EMAIL : engineering@the-mcgill-group.com

## FINISHES

COLOUR # \_\_\_\_\_

- MILL FINISH
- 5000 SERIES AAMA -603 BAKED ENAMEL
- 10000 SERIES AAMA -605.2 KYNAR 2 COAT
- 15000 SERIES AAMA -605.2 KYNAR 3 COAT
- CLEAR ANODIZING  .0004  .0007
- COLOUR ANODIZING \_\_\_\_\_

PROJECT

ARCH/ENG.

CONTRACTOR

REPRESENTATIVE

SCALE

DATE

SHEET

OF