

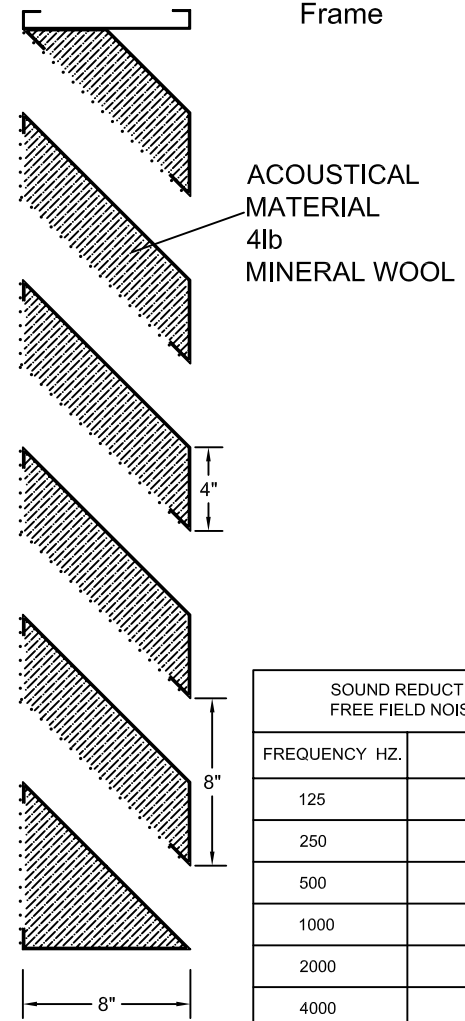


MODEL AC-845

AC-845

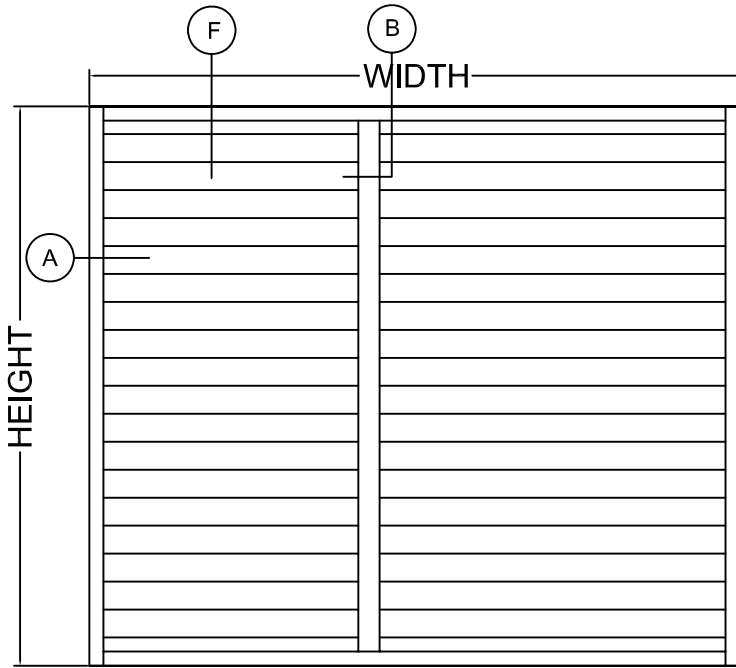

SOUND REDUCTION FREE FIELD NOISE	
FREQUENCY HZ.	-DB
125	-8
250	-9
500	-11
1000	-14
2000	-20
4000	-21

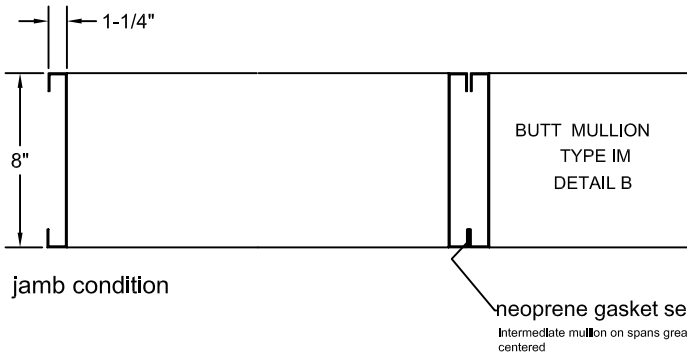

AC-845 SPECIFICATIONS

BLADES ACOUSTIC 4lb MINERAL WOOL

ASSEMBY - S/S MECHANICAL STANDARD
WELDED OPTIONAL

FRAME CHANNEL TYPE C

ALUMINUM EXTRUSION 2mm

FRAME .081(2mm) .125(3mm)

BLADE .081(2mm)

MULLIONS - INTERLOCK MULLION TYPE IM

SCREENS - ALUM. TYPE A
1/2" X 1/2" .063 WIRE
C/W FRAME

- GALVANIZED TYPE G - INSECT TYPE I
1/2" X 1/2" 19 GAUGE 18X14 ALUMINUM MESH

L#	QUANT.	OPENING SIZE		FRAME	MULL.	SECTIONS WIDE	SCREENS	LOCATION
		WIDTH	HEIGHT					
L-1								
L-2								
L-3								
L-4								
L-5								
L-6								
L-7								

McGILL LOUVRES

1734 Orangebrook Crt. (905) 420-0485 TEL.
Pickering Ontario (905) 420-4564 FAX
CANADA (888)-624-0485 TEL.
L1W 3G8 (888)-624-4554 FAX
EMAIL : engineering@the-mcgill-group.com

FINISHES

COLOUR # _____

- MILL FINISH
- 5000 SERIES AAMA -603 BAKED ENAMEL
- 10000 SERIES AAMA -605.2 KYNAR 2 COAT
- 15000 SERIES AAMA -605.2 KYNAR 3 COAT
- CLEAR ANODIZING .0004 .0007
- COLOUR ANODIZING _____

PROJECT		
ARCH/ENG.		
CONTRACTOR		
REPRESENTATIVE		
SCALE	DATE	SHEET
		OF